

Arc)Tag™




Applying the ArcTag™

- 1** Slide the opening onto the area of merchandise to be tagged ensuring the **clutch** is on the outside.



- 2** Press firmly on the red plunger. The item is now securely tagged!

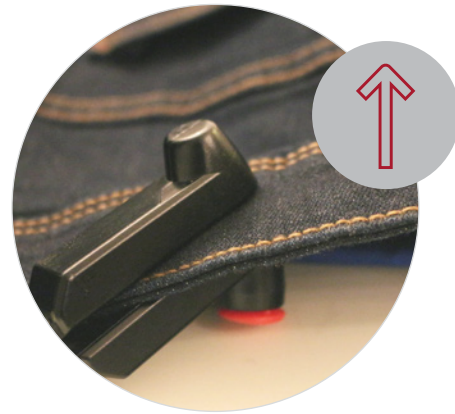

Releasing the ArcTag™

- 1** Apply the clutch to the detacher. If the plunger does not release immediately, press the top firmly and it will be released.



- 2** Remove the released ArcTag™.

