

## User Guide

# COMMANDER V2 DETACHER

### COMMANDER V2 DETACHER MAIN FEATURES:

- Two Barrel Keys for locking.
- 3x 1" screws for surface mounting.
- Compatible with S3, Standard lock and Superlock systems.
- Enhanced S3 plastic locators durability.
- No lanyard tangling – enhanced ball swivel connection.

**CAUTION:** Extremely powerful magnet. Do not place magnetic media such as credit cards near the Commander Detacher as this may erase the magnetic strip.

**NOTE:** US LETTER (11 X 8.5") TEMPLATE TO BE PRINTED AT 100% SIZE.



## Mounting

- 1** Select the location for the Commander V2 Detacher and mark screw positions using the base template on the back of this sheet. Drill pilot holes.
- 2** Remove the detacher from the housing to access the screw holes and fix down using the 1" screws.
- 3** Place the detacher back into the housing with the S3 compatible detacher and main detacher facing upwards. The Commander is ready to use.

## Lock/Unlock

- 1** To lock: Place the detacher into the housing with the S3 compatible detacher and main detacher facing downwards.
- 2** Insert barrel key into lock and push down before turning clockwise a quarter turn.
- 1** To unlock: Insert barrel key into the lock and push down before turning counter-clockwise.
- 2** Remove the released detacher and rotate to place into the housing with S3 compatible detacher and main detacher facing upwards.



## 🔧 Base Template

- 1 Place template on cash desk in desired location of Commander V2 Detacher.




- 2 Mark screw hole locations through sheet using the circular markings.



- 3 Remove template and drill pilot holes (ideally 1/16" diameter).



- 4 Place Commander V2 Detacher over pilot holes and screw securely to cash desk.

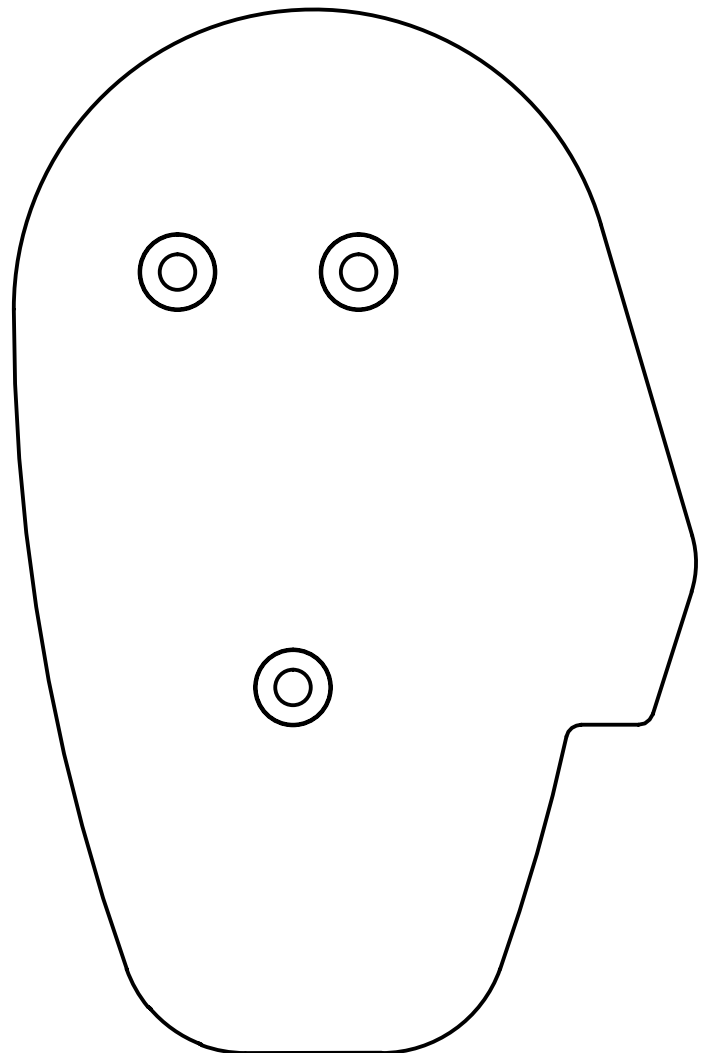

**NOTE:** US LETTER (11 X 8.5") TEMPLATE TO BE PRINTED AT 100% SIZE.