

OysterTag™ + S3 Detacher



Applying the OysterTag™

- 1** Insert the product into the Oyster Tag casing.




- 2** Close the yellow tag over the card tab and press the plunger to lock. The product is now ready to merchandise.



Releasing the OysterTag™

- 1** Place the S3 detacher on the clutch on the back of the tag to release.

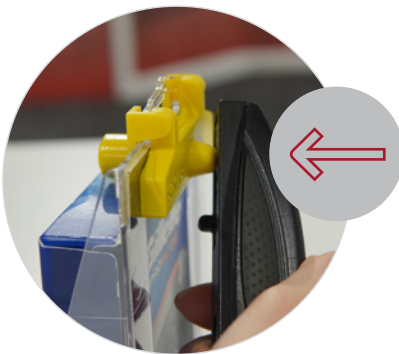

NOTE: If the plunger does not open to allow the removal, depress the plunger to release.

- 2** Remove the product from the Oyster Tag casing. The product is now ready to be sold.

